



MODEL 11 CAMERA DOLLY DIMENSIONS

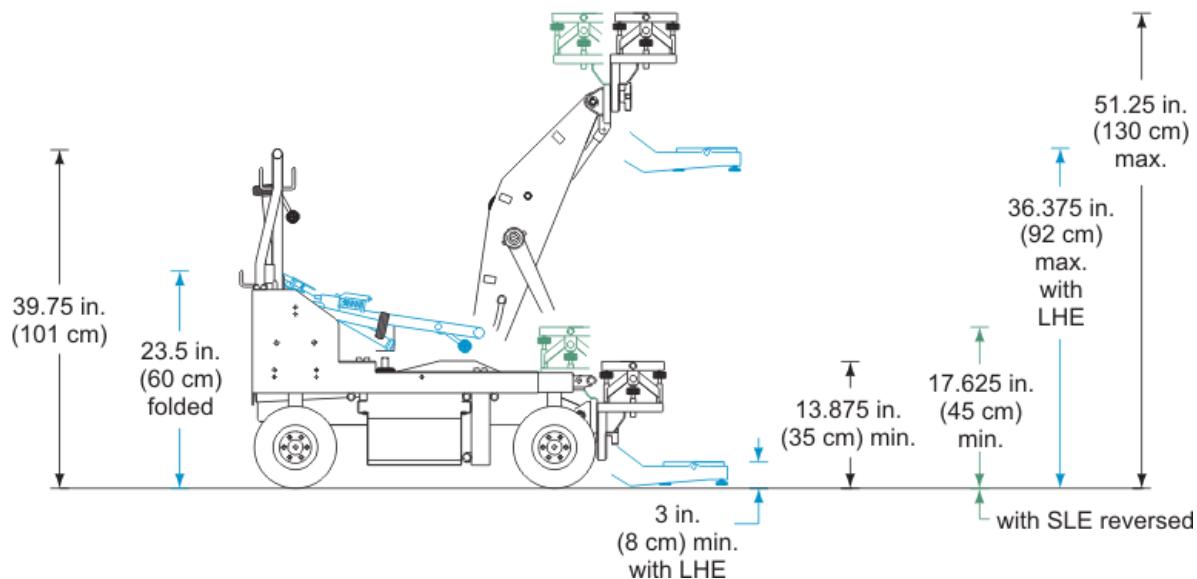

Maximum Lift Beam Elevation.....	51.25 in. (130 cm)
Minimum Elevation (standard head)	13.875 in. (35 cm)
Minimum Elevation (long low level head)	3 in. (8 cm)
Vertical Beam Travel.....	33.375 in. (85 cm)
Lift Beam Capacity.....	200 pounds (90.72 kg)
Lifts per System Charge.....	7
Length.....	40 in. (102 cm)
Width (wheels in)	20.5 in. (52 cm)
Width (wheels out)	25.625 in. (68 cm)
Height (operating)	39.75 in. (101 cm)
Height (folded)	23.5 in. (60 cm)
Height (center mount, before riser)	36.75 in. (93 cm)
Minimum Turn Radius (round steering).....	16.188 in. (41 cm)
Minimum Turn Radius (conventional steering).....	33.5 in. (85 cm)
Carrying Weight	307 pounds (139.25 kg)
Maximum Dolly Load Capacity.....	900 pounds (408.23 kg)
Crated Size	59 in. (150 cm) L x 31 in. (79 cm) W x 34 in. (86 cm) H
Crated Weight.....	775 pounds (351.5 kg) (standard package)

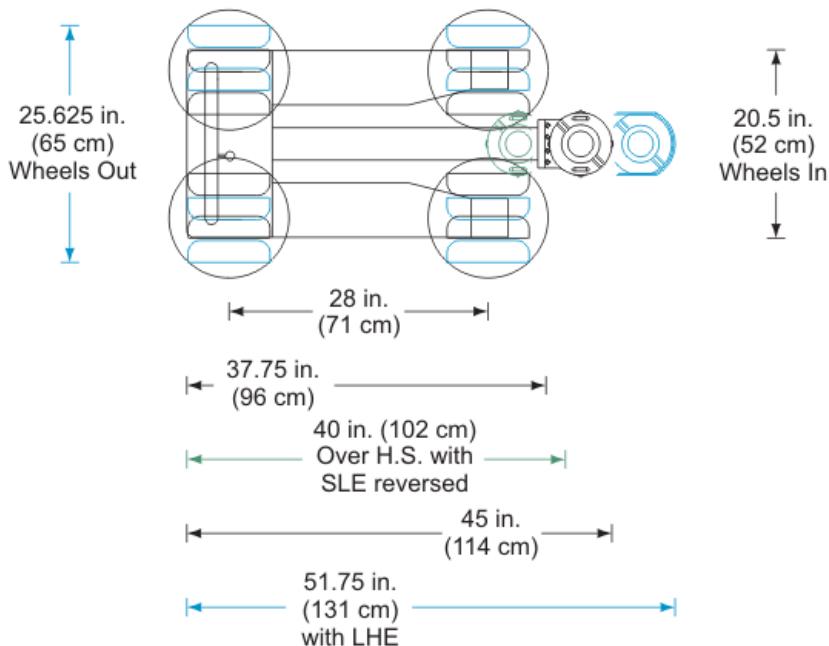