


# PHOENIX 40' REMOTE & RIDABLE

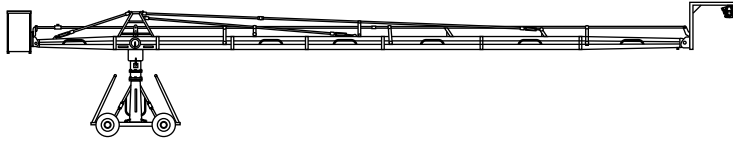

## Technical Specifications

### Height

Remote		Ridable	
Max.	38'	Max.	23' 3"
Min.	-22'	Min.	-10'

### Length

Remote		Ridable	
Max.	40' 0"	Max.	23' 10"
Min.	13' 6"	Min.	8' 6"

### Weight

Max Remote		Max Ridable	
Arm and Base	4000 lbs.	Arm and Base	3500 lbs.
With Max. Payload of 154 lbs		With Max. Payload of 506 lbs	

## !! Caution !!

Some weights listed are an approximation. Different cameras, heads, and accessories will alter payload weight, counterweight, and consequently total weight.

# VERSION GUIDE

## Remote

Height		Length		Payload
Short End Section	Long End Section	Short End Section	Long End Section	
16' 7"	18' 8"	13' 6"	16' 2"	187 lbs.
20' 8"	22' 9"	18' 7"	21' 4"	187 lbs.
24' 6"	26' 9"	23' 8"	26' 7"	187 lbs.
29' 9"	31' 10"	30' 6"	33' 4"	187 lbs.
34' 10"	38'	37' 2"	40'	154 lbs.

## Ridable

Height	Length	Payload
To Euro. Mount	To Euro. Mount	
11' 2"	8' 6"	550 lbs.
15' 3"	13' 4"	550 lbs.
19' 3"	18' 9"	550 lbs.
23' 3"	23' 10"	506 lbs.

# PHOENIX 40'

# REMOTE & RIDABLE

## Arm Pieces

Length	61"-86"
Width	1' 3 3/4" (153/4")
Height	10"
Weight	65-85 lbs.
Pieces	8

## Arm Clearance

Width	1' 3 3/4" (15 3/4")
Height	14"-24"

## Nose

Length	2' 5" (29")
Width	10"
Height	3' (36")
Weight	25 lbs.

## Bucket

Width	2' 9" (33")
Height	2' 9" (33")
Depth	1' 5" (17")
Weight	125 lbs.

## Weights

85 Large @ 32lbs
2 Small @ 16lbs

## Set-Up Time

Approx. 30min. w/two people

## Technician Required

Yes  No

## Base

Length	5' 6 1/2" (66 1/2")
Width	4' 11 1/4" (59 1/2")
Height	6' 5" (77")
Weight	225 lbs.

## Track

39" Wide Round Track

## Steering

Conventional
Crab*
Round*


\*When equipped with 2 sided steering. Contact source.

## Transportation Weight

Approximately 6500lbs.

## Transport Vehicle

12' Cube Van, or larger

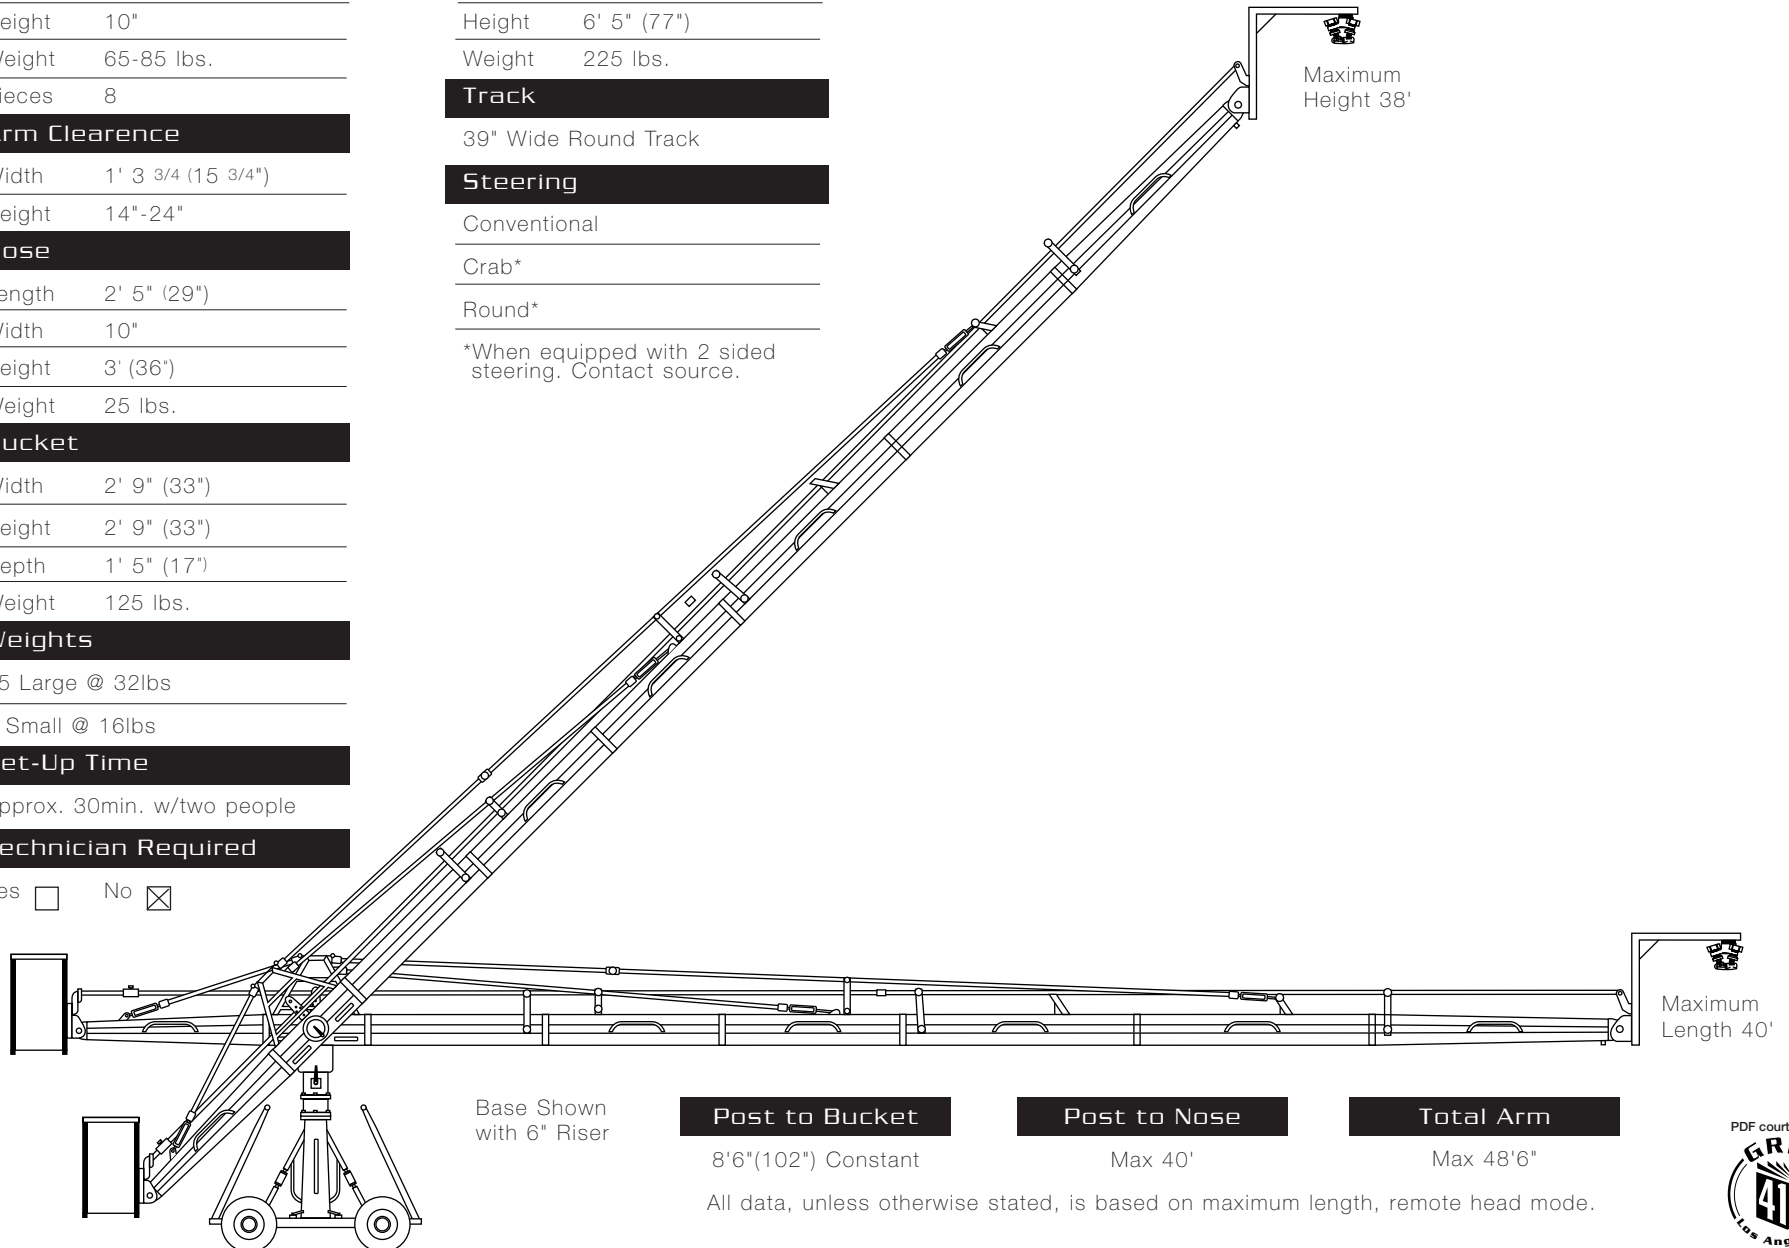

Base Shown with 6" Riser

### Post to Bucket

8'6"(102") Constant

### Post to Nose

Max 40'

### Total Arm

Max 48'6"

All data, unless otherwise stated, is based on maximum length, remote head mode.